

FEATURES & BENEFITS

OPTIONS

For more information, visit www.haws.ch or call + 41(0)34 420 60 00.




SPECIFICATIONS

Model SP157A scald protection bleed valve opens at 36.7° C and closes at 35° C. 1/2" NPT inlet and outlet.


APPLICATIONS

Specifically, SP157A is suitable for several emergency applications where scalding water temperature protection is needed or required. Can be used in conjunction with most Haws shower and/or eyewash units.

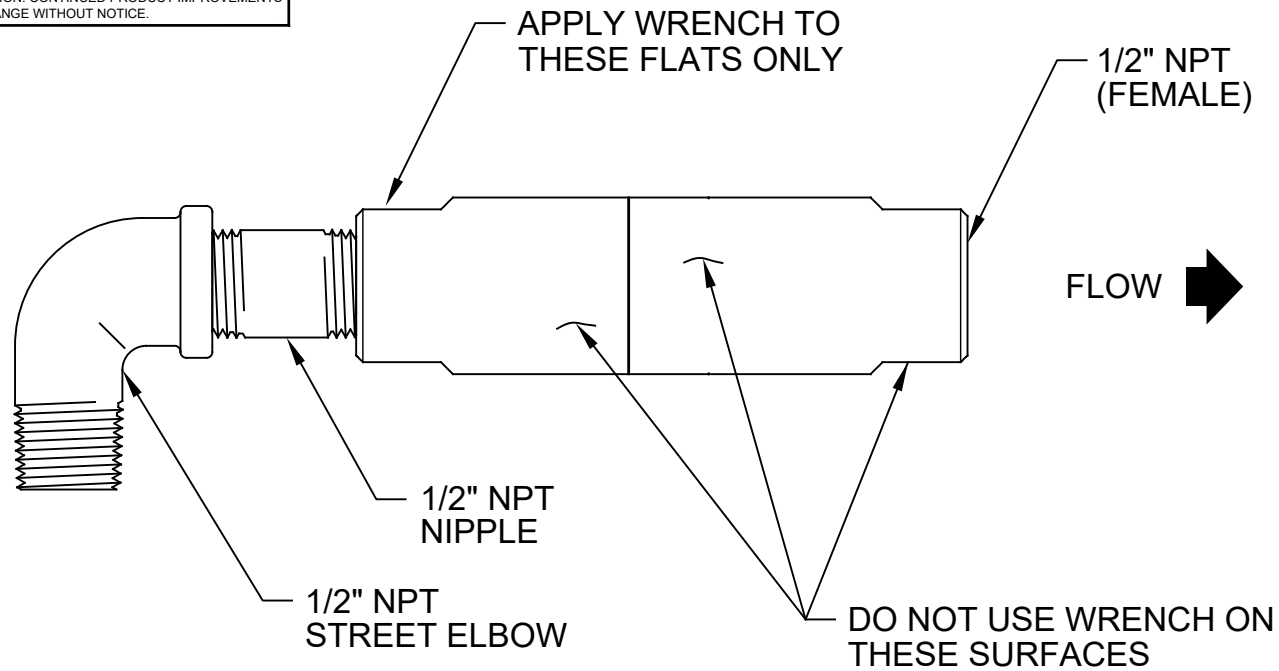


TYPICAL SHOWER EYEWASH LOOP INSTALLATION

NOTE: MODEL 8330 REQUIRES A 1-1/4" X 1/2" BUSHING (NOT SUPPLIED)

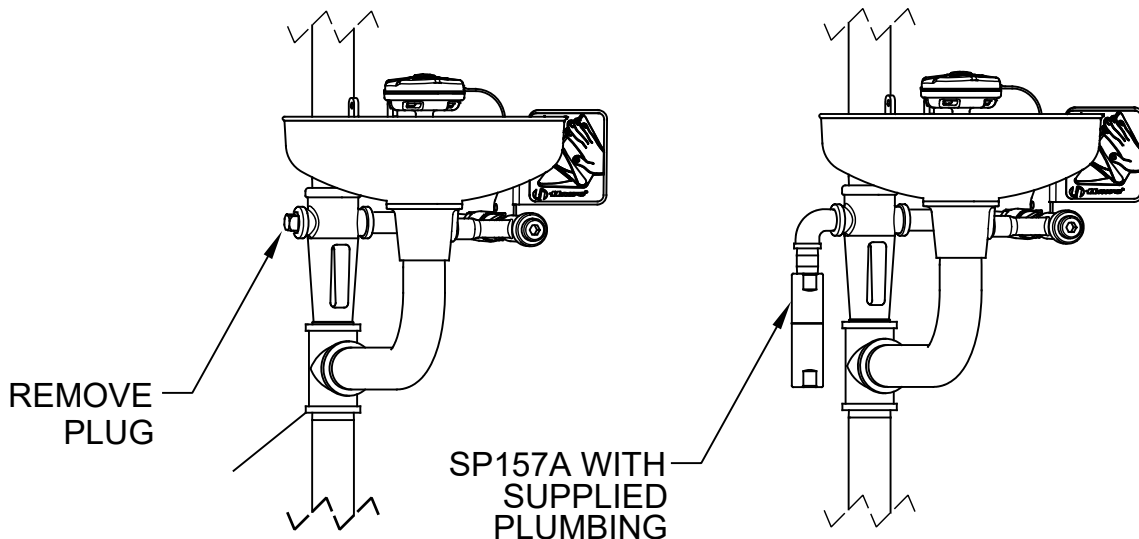

8317CTFP SCALD VALVE LOCATION

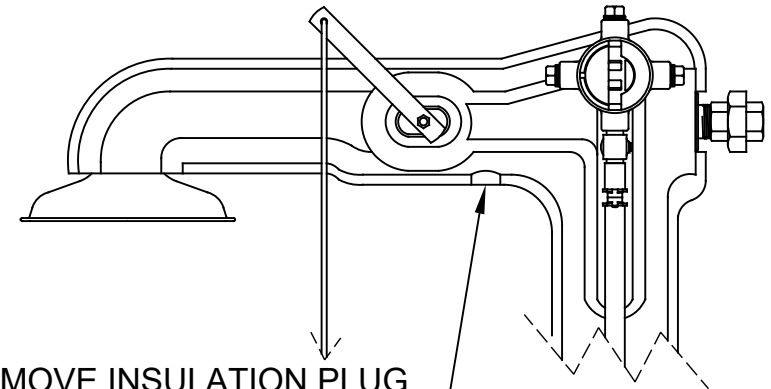

REMOVE INSULATION PLUG AND PLUMBING PLUG, AND INSTALL VALVE ONLY



1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO. REVISED PER BY:	ECN: 5478	JL	MODEL(S)		PART NUMBER
DRAWN: HM	DATE: 10/17/13	CHKD: DP	SP157A		0002080329.D
APPROVED: IR	DATE: 09/12/19		SCALD PROTECTION BLEED VALVE		REVISION
			SCALE: 1:1	DRAWING TYPE: INSTALLATION	5
				SIZE: A	SHEET 1 OF 1